



# Large Telescopic Monitor Stand Assembly Instructions

Monitor bracket supplied may vary from what is shown below

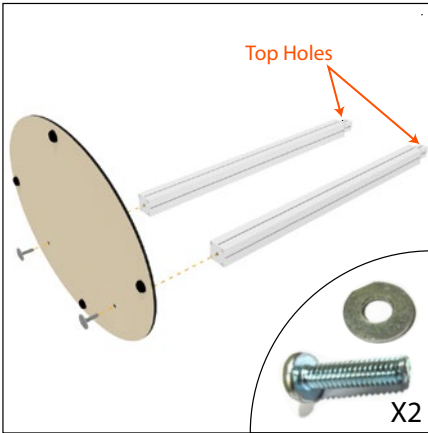


1. Connect column pieces to foot with two large screws and large washers. Make sure top holes are placed toward the outside edge of columns. Stand the display up.

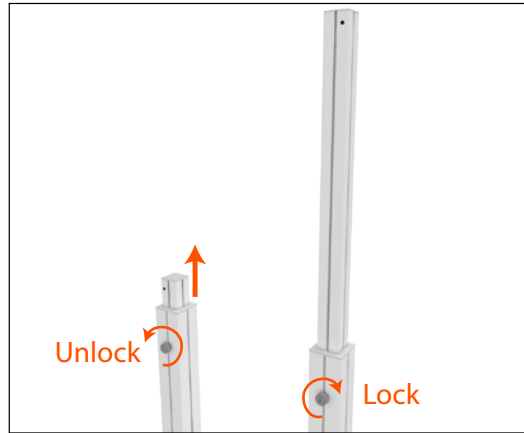

2. Loosen height adjustment knobs and extend columns to desired height. (60" from the ground is recommended)



3. Install monitor mount plate with 2.5" screws, small washers, and wing nuts. Level bracket by adjusting the column heights, and then tighten adjustment knobs and bracket screws.

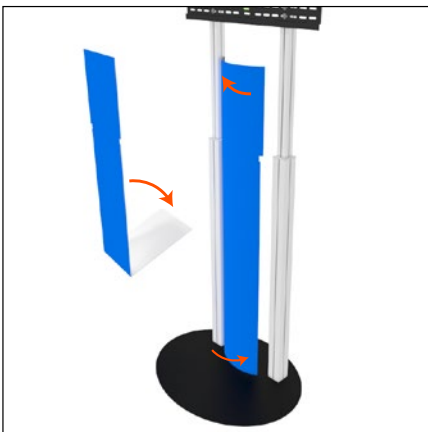

4. Unfold optional graphic. Place one graphic edge in column channel. Slightly bend graphic and tuck opposite side in opposite column channel.



5. Optionally, slide monitor bracket plate through hole in your tension fabric display. Slide one side of monitor bracket in, then the other.



6. Install monitor brackets to the back of the monitor using appropriate screws for the monitor you are using. See instruction manual included with the monitor bracket for details. *Note: We recommend monitors that do not exceed 50 lbs.*



7. Carefully hang monitor on stand. Spring loaded safety lock will automatically engage. Tuck the strings behind the monitor to hide. To remove the monitor, pull the strings down to disengage safety locks.

*Note: Large monitors may take two people to lift onto the stand*



8. Attach the shelf in the desired location using the star bit wrench. Cable clips may be used for holding wires out of the way.

